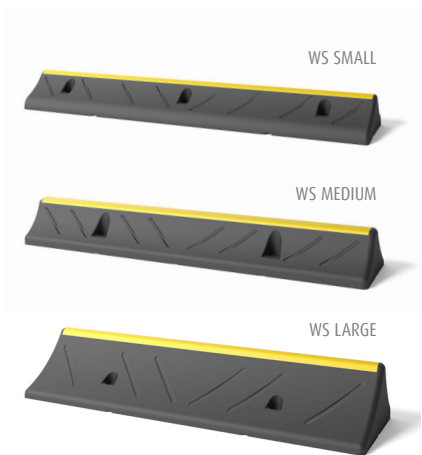



WS WHEELSTOP BOPLAN FLEX IMPACT SPECIFICATION SHEET

Boplan reference: WS - ...

Revision: 19 October 2018 10:14 AM

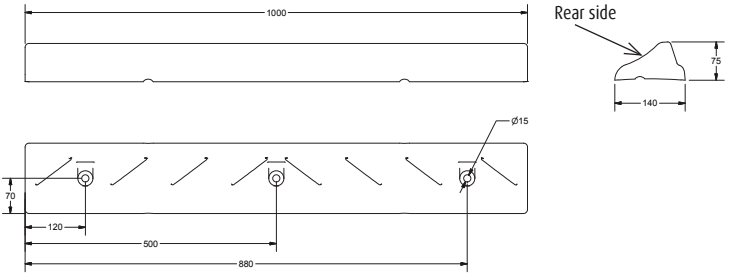
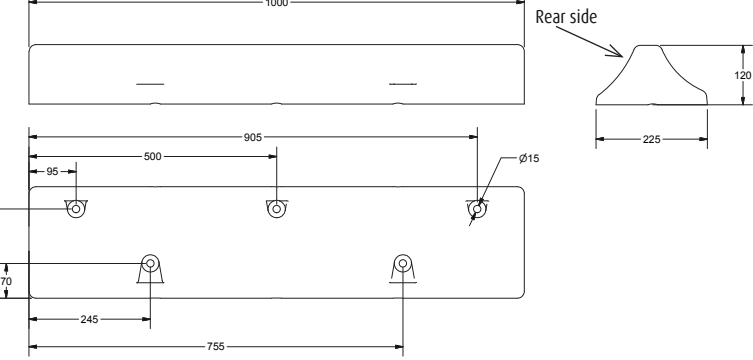


PRODUCT SPECIFICATIONS

APPLICATION			
Environment	The Wheel Stop is designed to be installed in parking spaces. The yellow top edge gives optimal visibility. The rear side is designed to pull vehicles back when override. Very robust solution.		
Operational temperature	-50°C up to +60°C		
MATERIAL			
composition	100% made from recycled tyres.		
Exposure to light	UV resistant		
STANDARD COLORS			
	Black base with yellow highlight line.		
FIXATIONS			
	ZINC COATED		
CONCRETE SCREW		Length = 130 mm Drill hole diameter = 17 mm Sw: 19mm	
SIZE AND PROPERTIES			
	SMALL	MEDIUM	LARGE
Dimensions	Width: 1000 mm Depth: 140 mm Height: 75 mm	Width: 1000 mm Depth: 225 mm Height: 120 mm	Width: 1000 mm Depth: 300 mm Height: 150 mm
Weight	7.2 kg	15 kg	25 kg
Number of fixations	3 pcs	5 pcs	5 pcs



REFERENCE LIST - WHEEL STOP

<p>Wheel Stop S - 1000x140x75mm (3f) - BL</p>	<p>WS0750-0140-1000BL</p>	
<p>Wheel Stop M - 1000x200x110mm (5f) - BL</p>	<p>WS1100-0200-1000BL</p>	
<p>Wheel Stop L - 1000x300x150mm (5f) - BL</p>	<p>WS1500-0300-1000BL</p>	